


FIG 44-H

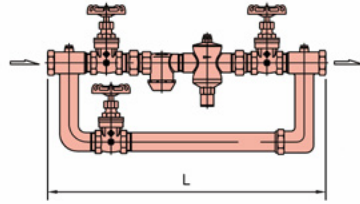

Features

- 模組化組合，操作簡單，安裝維修方便
- 減壓閥減壓比設定在 2 以下，可避免因過大回壓所產生的噪音
- 必要時可加水錘吸收器，確實減緩噪音
- 減壓閥前端裝設過濾器可過濾管內產生之雜質銹屑，確保管內流體乾淨度，避免因雜質銹屑阻塞造成減壓失效
- 裝設旁通閥可於減壓閥或閘閥拆卸保養維修時，暫時開啟旁通閥確保管線流體暢通不受影響

序號 NO.	零件	PART	材 質 MATERIAL
1	閘 閥	GATE VALVE	CAST BRONZE
2	過 濾 器	Y-STRAINER	CAST BRONZE
3	減 壓 閥	PRESSURE REDUCING VALVE	CAST BRONZE
4	管 材	PIPE	SUS 304

閥體測試壓力 (水壓)	20 kgf/cm <sup>2</sup>
壓力調整範圍	1 kgf/cm <sup>2</sup> ~ 5 kgf/cm <sup>2</sup>
	4 kgf/cm <sup>2</sup> ~ 9 kgf/cm <sup>2</sup>

詳細尺寸 Dimension

單位 Unit: 公釐 mm


規格	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Size	15	20	25	32	40	50
L	420	440	520	650	650	920

200K

壓力計緩衝調整閥

Dampener

FIG 22

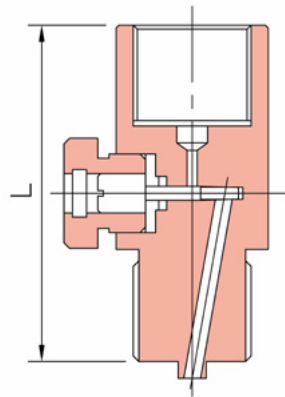

序號 NO.	零件	PART	材 質 MATERIAL
1	閥 體	BODY	BRASS
2	固定螺絲	FIXING NUT	BRASS
3	調整桿	ADJUSTABLE STEM	SUS 316
4	迫 緊	PACKING	PTFE
5	格 南	GLAND	BRASS/SUS 316

Max.allowable Working Pressure 最大允許工作壓力	20 Mpa
Pneumatic Test Pressure 測試壓力 (氣體)	30 Mpa
Fluid 使用流體	Liquid 液體
Use Fluid Temperature 使用流體溫度	Less then 80°C 低於 80°C

Features

- This dampener is of variable type being able to adjust pressure amplitude and applied to the decrease in pressure pulsation.
- Connection Type : Female thread x male thread

詳細尺寸 Dimension

單位 Unit: 公釐 mm

規格	PF1/2 x PT1/2	PF3/8 x PT3/8	PF1/4 X PT1/4	PF1/2 X PF1/2	PF3/8 X PF3/8	PF1/4 X PF1/4
Size	2244T	2233T	2222T	2244F	2233F	2222F
L	60	56	52	60	56	52