


球狀石墨鑄鐵球塞閥

Ductile Iron Ball Valve

FIG.16D JIS 10K/KGMC 16K

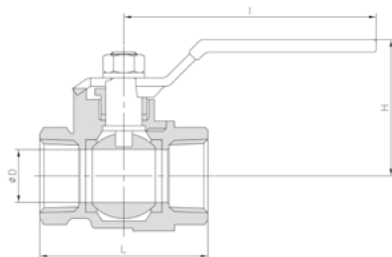

Features

- 2-Piece Body
- Threaded Ends
- Solid Ball
- Full Port

詳細尺寸 Dimension

規格	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Size	8	10	15	20	25	32	40	50
L	48	48	52	61	74	85	93	112
H	37	37	39	48	54	64	69	79
I	88	88	88	123	133	137	137	160
D	10	10	12.7	19	25	31.8	38	50

單位 Unit: 公釐 mm


序號 NO.	零件	PART	材質 MATERIAL
1	閥體	BODY	FCD 450-10
2	閥蓋	BONNET	FCD 450-10
3	閥球	BALL	C3604(PLATED W/Cr.)/S.S.304
4	閥桿	STEM	C3604(PLATED W/Cr.)/S.S.304
5	球墊	BALL SEAT	PTFE(25% CARBON)
6	迫緊	PACKING	GRAPHITE
7	格南	GLAND	C3604
8	把手	LEVER	SUS 304

Working pressure marking 標稱壓力	28 kgf/cm ²	Hydrostatic test pressure 試驗壓力 (水壓)	
Non-shock water under 120°C 120°C以下之靜流水	20 kgf/cm ²	Shell (HYD.) 閥體 (水壓)	20 kgf/cm ²
steam,Air,Oil, Pulse stream under 220°C 220°C以下之 蒸汽、氣體、油、脈動水	10 kgf/cm ²	Seat(AIR) 閥座 (氣壓)	6 kgf/cm ²

球狀石墨鑄鐵球塞閥

Ductile Iron Ball Valve

FIG.FK16D JIS 20K



Features

- 2-Piece Body
- Flanged Ends
- Solid Ball
- Full Port

詳細尺寸 Dimension

規格	SIZE	L	H	I	ØD
2"	50	193	120	221	155

單位 Unit: 公釐 mm

序號 NO.	零件	PART	材質 MATERIAL
1	閥體	BODY	FCD 450-10
2	閥蓋	BONNET	FCD 450-10
3	閥球	BALL	C3604(PLATED W/Cr.)/S.S. 304
4	閥桿	STEM	C3604(PLATED W/Cr.)/S.S. 304
5	球墊	BALL SEAT	PTFE(25% CARBON)
6	格南	GLAND	FCD 450-10
7	迫緊	PACKING	GRAPHITE
8	墊片	GASKET	NON-ASBESTOS
9	把手	LEVER	FC200

Working pressure marking 標稱壓力	20 kgf/cm ²	Hydrostatic test pressure 試驗壓力 (水壓)	
Non-shock water under 120°C 120°C以下之靜流水	28 kgf/cm ²	Shell Test Pressure 閥體測試壓力	44 kgf/cm ²
steam,Air,Oil, Pulse stream under 220°C 220°C以下之 蒸汽、氣體、油、脈動水	25 kgf/cm ²	Seat Test Pressure 閥座測試壓力	32 kgf/cm ²