


球狀石墨鑄鐵球型閥

Ductile Iron Globe Valve

FIG.FK39D JIS 20K

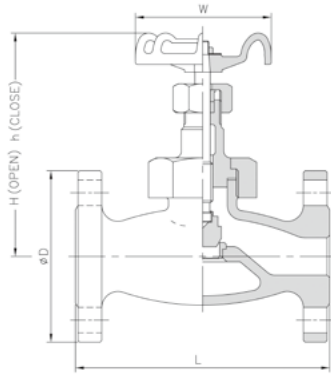

Features

- Inside Screw Rising Stem
- Union Bonnet
- Tapered Plug Type Disc
- Flanged Ends
- Graphite Packing
- Stainless steel Stem, Disc and Seat Ring
- JV 4-4

詳細尺寸 Dimension

規格	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Size	15	20	25	32	40	50
L	110	120	130	160	180	230
H	141	141	163	188	200	225
h	126	128	148	171	181	205
ØD	95	100	125	135	140	155
W	70	80	100	110	125	140

單位 Unit: 公釐 mm


序號 NO.	零件	PART	材質 MATERIAL
1	閥體	BODY	FCD 450-10
2	閥蓋	BONNET	FCD 450-10
3	閥門	DISC	SUS 410
4	閥桿	STEM	SUS 410
5	閥體座環	BODY SEAT RING	SUS 410
6	格南	GLAND	C3604 (PLATED W/Cr.)
7	迫緊	PACKING	GRAPHITE
8	墊片	GASKET	NON-ASBESTOS
9	迫緊螺帽	PACKING NUT	FCD 450-10
10	連結螺帽	CONNECTING NUT	FCD 450-10
11	手輪	HANDWHEEL	ALUMINIUM
12	銘牌	NAME PLATE	ALUMINIUM
13	手輪螺帽	HANDWHEEL NUT	STEEL

Working pressure marking 標稱壓力	20 kgf/cm ²	Hydrostatic test pressure 試驗壓力 (水壓)	
Non-shock water under 120°C 120°C以下之靜流水	28 kgf/cm ²	Shell Test Pressure 閥體測試壓力	44 kgf/cm ²
steam,Air,Oil,Pulse stream under 220°C 220°C以下之蒸汽、氣體、油、脈動水	25 kgf/cm ²		
steam,Air,Oil,Pulse stream under 300°C 300°C以下之蒸汽、氣體、油、脈動水	23 kgf/cm ²	Seat Test Pressure 閥座測試壓力	32 kgf/cm ²
steam,Air,Oil,Pulse stream under 350°C 350°C以下之蒸汽、氣體、油、脈動水	20 kgf/cm ²		

球狀石墨鑄鐵立式逆止閥

Ductile Iron Lift Check Valve

FIG.FK69D JIS 20K

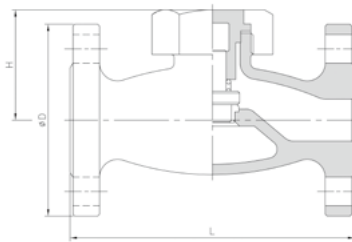

Features

- Lift Type Disc Design
- Union Cap
- Flanged Ends
- Stainless Steel Disc and Seat Ring
- JV 4-4

詳細尺寸 Dimension

規格	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Size	15	20	25	32	40	50
L	110	120	130	160	180	230
H	53	56	63	72	78	87
ØD	95	100	125	135	140	155

單位 Unit: 公釐 mm

序號 NO.	零件	PART	材質 MATERIAL
1	閥體	BODY	FCD 450-10
2	閥蓋	BONNET	1/2"~3/4" SUS 410
			1"~2" FCD 450-10
3	閥門	DISC	SUS 410
4	閥體座環	BODY SEAT RING	SUS 410
5	連結螺帽	CONNECTING NUT	FCD 450-10
6	墊片	GASKET	NON-ASBESTOS
7	彈簧	SPRING	SUS 304

Working pressure marking 標稱壓力	20 kgf/cm ²	Hydrostatic test pressure 試驗壓力 (水壓)	
Non-shock water under 120°C 120°C以下之靜流水	28 kgf/cm ²	Shell Test Pressure 閥體測試壓力	44 kgf/cm ²
steam,Air,Oil, Pulse stream under 220°C 220°C以下之 蒸汽、氣體、油、脈動水	25 kgf/cm ²		
steam,Air,Oil, Pulse stream under 300°C 300°C以下之 蒸汽、氣體、油、脈動水	23 kgf/cm ²	Seat Test Pressure 閥座測試壓力	32 kgf/cm ²
steam,Air,Oil, Pulse stream under 350°C 350°C以下之 蒸汽、氣體、油、脈動水	20 kgf/cm ²		