


球狀石墨鑄鐵球型閥

Ductile Iron Globe Valve

FIG.FK39D-BB JIS 20K

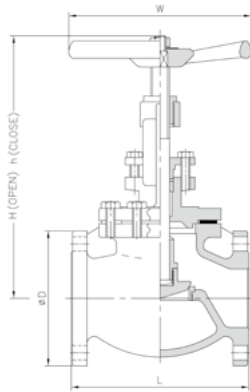

Features

- Outside Screw and Yoke(OS&Y)
- Bolted Bonnet
- Tapered Plug Type Disc
- Flanged Ends
- Graphite Packing
- Stainless steel Stem, Disc and Seat Ring
- JV 4-5

序號 NO.	零件	PART	材 質 MATERIAL
1	閥 體	BODY	FCD 450-10
2	閥 蓋	BONNET	FCD 450-10
3	閥 門	DISC	SUS 410
4	閥 桿	STEM	SUS 410
5	閥體座環	BODY SEAT RING	SUS 410
6	格 南	GLAND	FCD 450-10
7	迫 緊	PACKING	GRAPHITE
8	墊 片	GASKET	NON-ASBESTOS
9	手 輪	HANDWHEEL	FCD 450-10
10	襯 套	SCREWED BUSH	C3604

Working pressure marking 標 稱 壓 力	20 kgf/cm ²	Hydrostatic test pressure 試 驗 壓 力 (水 壓)	
Non-shock water under 120°C 120°C以下之靜流水	28 kgf/cm ²	Shell Test Pressure 閥體測試壓力	44 kgf/cm ²
steam,Air,Oil,Pulse stream under 220°C 220°C以下之蒸汽、氣體、油、脈動水	23 kgf/cm ²	Seat Test Pressure 閥座測試壓力	32 kgf/cm ²
steam,Air,Oil,Pulse stream under 350°C 350°C以下之蒸汽、氣體、油、脈動水	20 kgf/cm ²		

詳細尺寸 Dimension


單位 Unit: 公釐 mm

規格	2-1/2"	3"	4"	5"	6"
Size	65	80	100	125	150
L	292	318	356	400	444
H	345	380	385	450	480
h	307	334	356	400	461
ØD	175	200	225	270	305
W	220	220	260	330	330

球狀石墨鑄鐵立式逆止閥

Ductile Iron Lift Check Valve

FIG.FK69D-BC JIS 20K



Features

- Lift Type Disc Design
- Bolted Cap
- Flanged Ends
- Stainless Steel Disc and Seat Ring
- JV 4-5

序號 NO.	零件	PART	材 質 MATERIAL
1	閥 體	BODY	FCD 450-10
2	閥 蓋	CAP	FCD 450-10
3	閥 門	DISC	SUS 410
4	閥體座環	BODY SEAT RING	SUS 410
5	彈 簧	SPRING	SUS 304
6	閥蓋襯套	BONNET RING	SUS 410
7	墊 片	GASKET	NON-ASBESTOS

Working pressure marking 標 稱 壓 力	20 kgf/cm ²	Hydrostatic test pressure 試 驗 壓 力 (水 壓)	
Non-shock water under 120°C 120°C以下之靜流水	28 kgf/cm ²	Shell Test Pressure 閥體測試壓力	44 kgf/cm ²
steam,Air,Oil,Pulse stream under 220°C 220°C以下之蒸汽、氣體、油、脈動水	23 kgf/cm ²	Seat Test Pressure 閥座測試壓力	32 kgf/cm ²
steam,Air,Oil,Pulse stream under 350°C 350°C以下之蒸汽、氣體、油、脈動水	20 kgf/cm ²		

詳細尺寸 Dimension

單位 Unit: 公釐 mm

規格	2-1/2"	3"	4"	5"	6"
Size	65	80	100	125	150
L	292	318	356	400	444
H	125	140	150	175	190
ØD	175	200	225	270	305