


# 球狀石墨鑄鐵球型閥

Ductile Iron Globe Valve

FIG.U39D JIS 20K

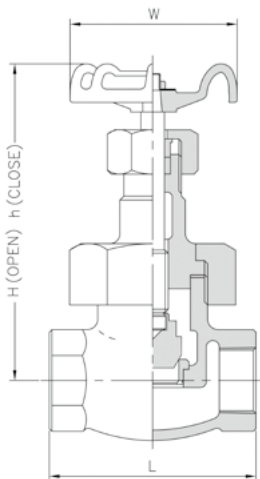

**Features**

- Inside Screw Rising Stem
- Union Bonnet
- Tapered Plug Type Disc
- Threaded Ends
- Graphite Packing
- Stainless steel Stem, Disc and Seat Ring
- JV 4-4

**詳細尺寸 Dimension**

規格	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Size	15	20	25	32	40	50
L	78	91	105	122	135	160
H	142	142	153	178	197	226
h	127	130	145	159	178	205
W	70	80	100	100	125	140

序號 NO.	零 件	PART	材 質 MATERIAL
1	閥 體	BODY	FCD 450-10
2	閥 蓋	BONNET	FCD 450-10
3	閥 門	DISC	SUS 410
4	閥 桿	STEM	SUS 410
5	閥體座環	BODY SEAT RING	SUS 410
6	格 南	GLAND	C3604 (PLATED W/Cr.)
7	迫 緊	PACKING	GRAPHITE
8	迫緊螺帽	PACKING NUT	FCD 450-10
9	連結螺帽	CONNECTING NUT	FCD 450-10
10	墊 片	GASKET	NON-ASBESTOS
11	手 輪	HANDWHEEL	ALUMINIUM
12	銘 牌	NAME PLATE	ALUMINIUM
13	手輪螺帽	HANDWHEEL NUT	STEEL


Working pressure marking 標 稱 壓 力	20 kgf/cm <sup>2</sup>	Hydrostatic test pressure 試 驗 壓 力 (水 壓)	
Non-shock water under 120°C 120°C以下之靜流水	28 kgf/cm <sup>2</sup>	Shell Test Pressure 閥體測試壓力	44 kgf/cm <sup>2</sup>
steam, Air, Oil, Pulse stream under 220°C 220°C以下之 蒸汽、氣體、油、脈動水	23 kgf/cm <sup>2</sup>	Seat Test Pressure 閥座測試壓力	32 kgf/cm <sup>2</sup>
Steam, Air, Oil, Pulse stream under 350°C 350°C以下之 蒸汽、氣體、油、脈動水	20 kgf/cm <sup>2</sup>		

單位 Unit: 公釐 mm

# 球狀石墨鑄鐵立式逆止閥

Ductile Iron Lift Check Valve

FIG.U69D JIS 20K



**Features**

- Lift Type Disc Design
- Union Cap
- Threaded Ends
- Stainless Steel Disc and Seat Ring
- JV 4-4

**詳細尺寸 Dimension**

規格	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Size	15	20	25	32	40	50
L	78	91	105	122	135	160
H	53	56	57	67	75	91

序號 NO.	零 件	PART	材 質 MATERIAL
1	閥 體	BODY	FCD 450-10
2	閥 蓋	BONNET	1/2"~3/4" SUS 304
			1"~2" FCD 450-10
3	閥 門	DISC	SUS 410
4	墊 片	GASKET	NON-ASBESTOS
5	閥體座環	BODY SEAT RING	SUS 410
6	彈 簧	SPRING	SUS 304
7	連結螺帽	CONNECTING NUT	FCD 450-10

Working pressure marking 標 稱 壓 力	20 kgf/cm <sup>2</sup>	Hydrostatic test pressure 試 驗 壓 力 (水 壓)	
Non-shock water under 120°C 120°C以下之靜流水	28 kgf/cm <sup>2</sup>	Shell Test Pressure 閥體測試壓力	44 kgf/cm <sup>2</sup>
steam, Air, Oil, Pulse stream under 220°C 220°C以下之 蒸汽、氣體、油、脈動水	23 kgf/cm <sup>2</sup>	Seat Test Pressure 閥座測試壓力	32 kgf/cm <sup>2</sup>
Steam, Air, Oil, Pulse stream under 350°C 350°C以下之 蒸汽、氣體、油、脈動水	20 kgf/cm <sup>2</sup>		

單位 Unit: 公釐 mm