


球狀石墨鑄鐵閘門閥

Ductile Iron Gate Valve

FIG.F45D JIS-10K

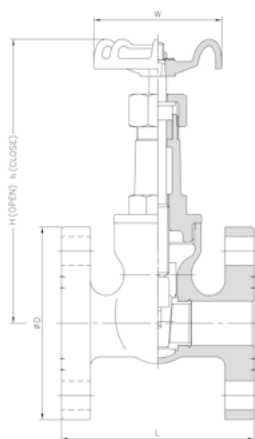

Features

- Inside Screw Rising Stem
- Graphite Packing
- Screwed Bonnet
- Strainless Steel Stem, Disc and Seat Ring
- Solid Wedge Disc
- JV 4-2
- Flanged Ends

詳細尺寸 Dimension

規格	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Size	15	20	25	32	40	50
L	90	100	110	120	130	140
H	153	176	203	238	278	319
h	135	153	170	200	232	264
ØD	95	100	125	135	140	155
W	70	80	90	100	125	140

單位 Unit: 公釐 mm


序號 NO.	零件	PART	材 質 MATERIAL
1	閥 體	BODY	FCD 450-10
2	閥 蓋	BONNET	FCD 450-10
3	閥體座環	BODY SEAT RING	SUS 410
4	閥 門	DISC	SCS 1
5	閥 桿	STEM	SUS 410
6	格 南	GLAND	SUS 410
7	迫 緊	PACKING	GRAPHITE
8	墊料螺帽	PACKING NUT	FCD 450-10
9	手 輪	HANDWHEEL	ALUMINIUM
10	銘 牌	NAME PLATE	ALUMINIUM
11	手輪螺帽	HANDWHEEL NUT	STEEL

Working pressure marking 標 稱 壓 力	10 kgf/cm ²	Hydrostatic test pressure 試驗壓力 (水壓)	
Non-shock water under 120°C 120°C以下之靜流水	14 kgf/cm ²	Shell Test Pressure(Water) 閥體測試壓力	20 kgf/cm ²
steam,Air,Oil, Pulse stream under 220°C 220°C以下之 蒸汽、氣體、油、脈動水	10 kgf/cm ²	Seat Test Pressure(Air) 閥座測試壓力	15 kgf/cm ²

球狀石墨鑄鐵閘門閥

Ductile Iron Gate Valve

FIG.F47D JIS-16K

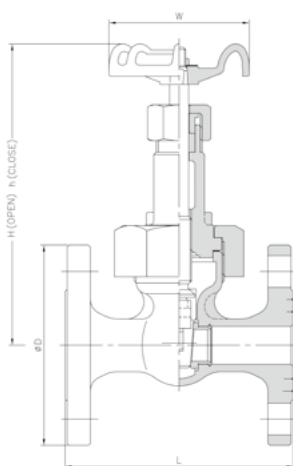

Features

- Inside Screw Rising Stem
- Back Seat
- Union Bonnet
- Graphite Packing
- Solid Wedge Disc
- Strainless Steel Stem, Disc and Seat Ring
- Flanged Ends
- JV 4-2

詳細尺寸 Dimension

規格	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Size	15	20	25	32	40	50
L	108	117	127	140	165	178
H	159	181	212	246	277	331
h	141	158	182	208	235	276
ØD	95	100	125	135	140	155
W	70	80	90	100	125	140

單位 Unit: 公釐 mm

序號 NO.	零件	PART	材 質 MATERIAL
1	閥 體	BODY	FCD 450-10
2	閥 蓋	BONNET	FCD 450-10
3	閥體座環	BODY SEAT RING	SUS 410
4	閥 門	DISC	SCS 1
5	閥 桿	STEM	SUS 410
6	墊 片	GASKET	COPPER(99%Cu)
7	連結螺帽	CONNECTING NUT	FCD 450-10
8	格 南	GLAND	SUS 410
9	迫 緊	PACKING	GRAPHITE
10	墊料螺帽	PACKING NUT	FCD 450-10
11	手 輪	HANDWHEEL	ALUMINIUM
12	銘 牌	NAME PLATE	ALUMINIUM
13	手輪螺帽	HANDWHEEL NUT	STEEL

Working pressure marking 標 稱 壓 力	16 kgf/cm ²	Hydrostatic test pressure 試驗壓力 (水壓)	
Non-shock water under 120°C 120°C以下之靜流水	22 kgf/cm ²	Shell Test Pressure(Water) 閥體測試壓力	33 kgf/cm ²
steam,Air,Oil, Pulse stream under 220°C 220°C以下之 蒸汽、氣體、油、脈動水	20 kgf/cm ²	Seat Test Pressure(Air) 閥座測試壓力	24.2 kgf/cm ²