


# 球狀石墨鑄鐵球型閥

Ductile Iron Globe Valve

FIG.F39D JIS 10K

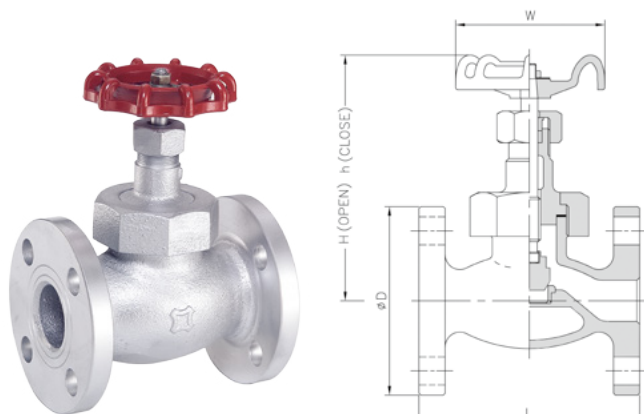

**Features**

- Inside Screw Rising Stem
- Union Bonnet
- Tapered Plug Type Disc
- Flanged Ends
- Graphite Packing
- Stainless steel Stem, Disc and Seat Ring
- JV 4-2

**詳細尺寸 Dimension**

規格	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Size	15	20	25	32	40	50
L	108	117	127	140	165	203
H	142	144	160	190	201	250
h	126	129	146	172	181	230
ØD	95	100	127	140	165	203
W	70	80	90	100	125	140

單位 Unit: 公釐 mm


序號 NO.	零件	PART	材質 MATERIAL
1	閥體	BODY	FCD 450-10
2	閥蓋	BONNET	FCD 450-10
3	閥門	DISC	SUS 410
4	閥桿	STEM	SUS 410
5	閥體座環	BODY SEAT RING	SUS 410
6	格南	GLAND	C3604 (PLATED W/Cr.)
7	迫緊	PACKING	GRAPHITE
8	墊片	GASKET	NON-ASBESTOS
9	墊料螺帽	PACKING NUT	FCD 450-10
10	連結螺帽	CONNECTING NUT	FCD 450-10
11	手輪	HANDWHEEL	ALUMINIUM
12	銘牌	NAME PLATE	ALUMINIUM
13	手輪螺帽	HANDWHEEL NUT	STEEL

Working pressure marking 標稱壓力	10 kgf/cm <sup>2</sup>	Hydrostatic test pressure 試驗壓力 (水壓)	
Non-shock water under 120°C 120°C以下之靜流水	14 kgf/cm <sup>2</sup>	Shell Test Pressure 閥體測試壓力	20 kgf/cm <sup>2</sup>
steam, Air, Oil, Pulse stream under 220°C 220°C以下之 蒸汽、氣體、油、脈動水	10 kgf/cm <sup>2</sup>	Seat Test Pressure 閥座測試壓力	15 kgf/cm <sup>2</sup>

# 球狀石墨鑄鐵球型閥

Ductile Iron Globe Valve

FIG.F39D-G JIS 10K

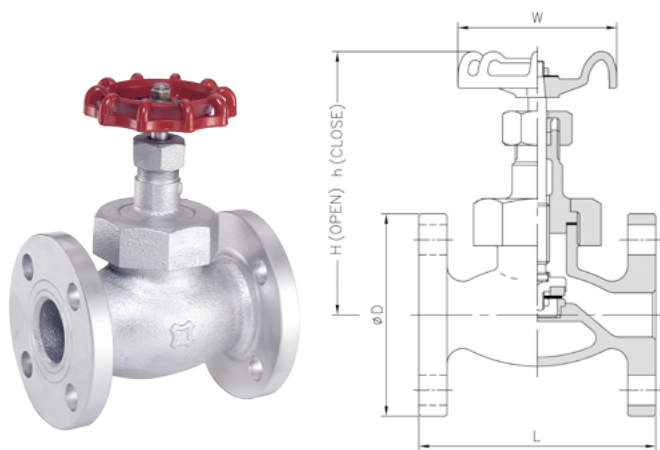

**Features**

- Inside Screw Rising Stem
- Union Bonnet
- PTFE Disc
- Flanged Ends
- Graphite Packing
- Stainless steel Stem, Disc Holder and Seat Ring
- JV 4-2

**詳細尺寸 Dimension**

規格	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Size	15	20	25	32	40	50
L	108	117	127	140	165	203
H	142	144	159	180	200	224
h	124	126	141	160	176	199
ØD	95	100	125	135	140	155
W	70	80	90	100	125	140

單位 Unit: 公釐 mm

序號 NO.	零件	PART	材質 MATERIAL
1	閥體	BODY	FCD 450-10
2	閥蓋	BONNET	FCD 450-10
3	閥門支架	DISC HOLDER	SUS 410
4	閥桿	STEM	SUS 410
5	閥體座環	BODY SEAT RING	SUS 410
6	格南	GLAND	C3604 (PLATED W/Cr.)
7	迫緊	PACKING	GRAPHITE
8	墊片	GASKET	NON-ASBESTOS
9	迫緊螺帽	PACKING NUT	FCD 450-10
10	連結螺帽	CONNECTING NUT	FCD 450-10
11	閥門	DISC	PTFE+15%G.F.T
12	手輪	HANDWHEEL	ALUMINIUM
13	銘牌	NAME PLATE	ALUMINIUM
14	手輪螺帽	HANDWHEEL NUT	STEEL

Working pressure marking 標稱壓力	10 kgf/cm <sup>2</sup>	Hydrostatic test pressure 試驗壓力 (水壓)	
Non-shock water under 120°C 120°C以下之靜流水	14 kgf/cm <sup>2</sup>	Shell Test Pressure 閥體測試壓力	20 kgf/cm <sup>2</sup>
steam, Air, Oil, Pulse stream under 220°C 220°C以下之 蒸汽、氣體、油、脈動水	10 kgf/cm <sup>2</sup>	Seat Test Pressure 閥座測試壓力	15 kgf/cm <sup>2</sup>