


球狀石墨鑄鐵球型閥

Ductile Iron Globe Valve

FIG.F39D-BB JIS 10K/KGMC 16K

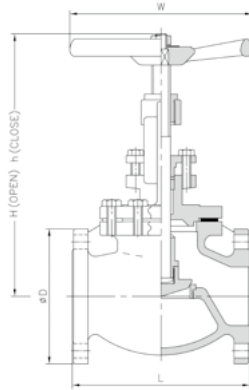

Features

- Outside Screw and Yoke(OS&Y)
- Bolted Bonnet
- Tapered Plug Type Disc
- Flanged Ends
- Graphite Packing
- Stainless steel Stem, Disc and Seat Ring
- JV 4-3

詳細尺寸 Dimension

| 規格 | 2-1/2" | 3" | 4" | 5" | 6" |
|------|--------|-----|-----|-----|-----|
| Size | 65 | 80 | 100 | 125 | 150 |
| L | 216 | 241 | 292 | 357 | 406 |
| H | 341 | 378 | 396 | 467 | 536 |
| h | 307 | 334 | 356 | 400 | 461 |
| ØD | 175 | 185 | 210 | 250 | 280 |
| W | 224 | 250 | 300 | 315 | 360 |

單位 Unit: 公釐 mm


| 序號 NO. | 零件 | PART | 材質 MATERIAL |
|--------|------|----------------|--------------|
| 1 | 閥體 | BODY | FCD 450-10 |
| 2 | 閥蓋 | BONNET | FCD 450-10 |
| 3 | 閥門 | DISC | SUS 410 |
| 4 | 閥桿 | STEM | SUS 410 |
| 5 | 閥體座環 | BODY SEAT RING | SUS 410 |
| 6 | 格南 | GLAND | FCD 450-10 |
| 7 | 迫緊 | PACKING | GRAPHITE |
| 8 | 墊片 | GASKET | NON-ASBESTOS |
| 9 | 手輪 | HANDWHEEL | FCD 450-10 |
| 10 | 襯套 | SCREWED BUSH | C3604 |

| Working pressure marking 標稱壓力 | 16 kgf/cm ² | Hydrostatic test pressure 試驗壓力 (水壓) | |
|---|------------------------|--|------------------------|
| Non-shock water under 120°C 120°C以下之靜流水 | 14 kgf/cm ² | Shell Test Pressure 閥體測試壓力 | 20 kgf/cm ² |
| steam, Air, Oil, Pulse stream under 220°C 220°C以下之 蒸汽、氣體、油、脈動水 | 10 kgf/cm ² | Seat Test Pressure 閥座測試壓力 | 15 kgf/cm ² |

球狀石墨鑄鐵立式逆止閥

Ductile Iron Lift Check Valve

FIG.F69D-BC JIS 10K/KGMC 16K



Features

- Lift Type Disc Design
- Bolted Cap
- Flanged Ends
- Stainless Steel Disc and Seat Ring
- JV 4-3

詳細尺寸 Dimension

| 規格 | 2-1/2" | 3" | 4" | 5" | 6" |
|------|--------|-----|-----|-----|-----|
| Size | 65 | 80 | 100 | 125 | 150 |
| L | 216 | 241 | 292 | 356 | 406 |
| H | 123 | 140 | 170 | 260 | 280 |
| ØD | 175 | 185 | 210 | 250 | 280 |

單位 Unit: 公釐 mm

| 序號 NO. | 零件 | PART | 材質 MATERIAL |
|--------|------|----------------|--------------|
| 1 | 閥體 | BODY | FCD 450-10 |
| 2 | 閥蓋 | CAP | FCD 450-10 |
| 3 | 閥門 | DISC | SUS 410 |
| 4 | 閥體座環 | BODY SEAT RING | SUS 410 |
| 5 | 彈簧 | SPRING | SUS 304 |
| 6 | 閥蓋襯套 | BONNET RING | SUS 410 |
| 7 | 墊片 | GASKET | NON-ASBESTOS |

| Working pressure marking 標稱壓力 | 16 kgf/cm ² | Hydrostatic test pressure 試驗壓力 (水壓) | |
|---|------------------------|--|------------------------|
| Non-shock water under 120°C 120°C以下之靜流水 | 14 kgf/cm ² | Shell Test Pressure 閥體測試壓力 | 20 kgf/cm ² |
| steam, Air, Oil, Pulse stream under 220°C 220°C以下之 蒸汽、氣體、油、脈動水 | 10 kgf/cm ² | Seat Test Pressure 閥座測試壓力 | 15 kgf/cm ² |