
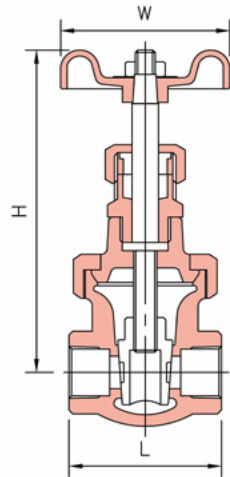


CLASS 300

青(砲金)銅閘門閥 (非昇桿式)

Bronze Gate Valve
(Non-Rising Stem)

FIG 0230

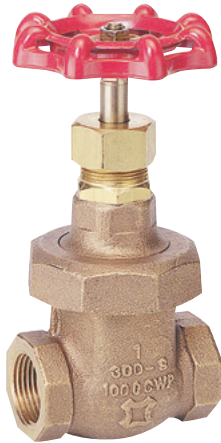

Features

- Non-Rising Stem
- Graphite Packing
- Union Bonnet
- Integral Bronze Seat
- Solid Wedge Disc
- MSS Specification SP-80 Type 1A
- Threaded Ends
- Full Ports

序號 NO.	零件	PART	材 質 MATERIAL	
1	閥 體	BODY	ASTM B61-C92200	
2	閥 蓋	BONNET	ASTM B61-C92200	
3	閥 門	DISC	ASTM B62-C83600	
4	閥 桿	STEM	ASTM B62-C83600	
5	迫緊螺帽	PACKING NUT	1/4"~ 1-1/4"	ASTM B16-C36000
			1-1/2"~ 2"	ASTM B62-C83600
6	固定螺栓	STUFFING BOX	1/4"~ 1-1/4"	ASTM B16-C36000
			1-1/2"~ 2"	ASTM B62-C83600
7	連結螺帽	CONNCTING NUT	ASTM B61-C92200	
8	格 南	GLAND	ASTM B16-C36000	
9	迫 緊	PACKING	GRAPHITE	
10	手 輪	HANDWHEEL	ALUMINUM	
11	銘 牌	NAME PLATE	ALUMINUM	
12	螺 帽	HANDWHEEL NUT	STEEL	

Working Pressure Non-Shock 最高工作壓力 (靜流水)		Hydrostatic Test Pressure 試驗壓力 (水壓)		
Steam, Water, Oil or Gas 蒸汽 . 水 . 油或氣體	300 psi	Shell Test Pressure 閥體測試壓力	Air 氣壓 80 psi	Water 水壓 1500 psi
Cold Working Pressure 常溫工作壓力	1000 psi	Seat Test Pressure 閥座測試壓力	80 psi	1000 psi

*Temperature limitation of 450°F (232°C)

詳細尺寸 Dimension

規格	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Size	8	10	15	20	25	32	40	50
L	54	54	60	69	80	94	105	127
H	103	103	126	144	164	185	201	236
W	55	55	63	70	90	90	100	125


單位 Unit: 公釐 mm

CLASS 300

青(砲金)銅閘門閥 (昇桿式)

Bronze Gate Valve
(Rising Stem)

FIG 0234

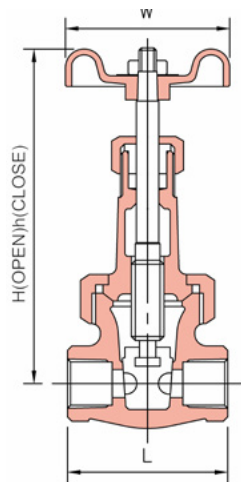

Features

- Rising Stem
- Back Seat
- Union Bonnet
- Graphite Packing
- Solid Wedge Disc
- Integral Bronze Seat
- Threaded Ends
- Stainless Steel Seat Rings Fig.0236
- Full Ports
- MSS Specification SP-80 Type 2

序號 NO.	零件	PART	材 質 MATERIAL	
1	閥 體	BODY	ASTM B61-C92200	
2	閥 蓋	BONNET	ASTM B61-C92200	
3	閥 門	DISC	ASTM B62-C83600	
4	閥 桿	STEM	ASTM B62-C83600	
5	迫緊螺帽	PACKING NUT	1/4"~ 1-1/4"	ASTM B16-C36000
			1-1/2"~ 2"	ASTM B62-C83600
6	連結螺帽	CONNECTING NUT	ASTM B61-C92200	
7	格 南	GLAND	ASTM B16-C36000	
8	迫 緊	PACKING	GRAPHITE	
9	手 輪	HANDWHEEL	ALUMINUM	
10	銘 牌	NAME PLATE	ALUMINUM	
11	螺 帽	HANDWHEEL NUT	STEEL	

Working Pressure Non-Shock 最高工作壓力 (靜流水)		Hydrostatic Test Pressure 試驗壓力 (水壓)		
Steam, Water, Oil or Gas 蒸汽 . 水 . 油或氣體	300 psi	Shell Test Pressure 閥體測試壓力	Air 氣壓 80 psi	Water 水壓 1500 psi
Cold Working Pressure 常溫工作壓力	1000 psi	Seat Test Pressure 閥座測試壓力	80 psi	1000 psi

*Temperature limitation of 450°F (232°C)

詳細尺寸 Dimension

規格	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Size	8	10	15	20	25	32	40	50
L	54	54	60	69	80	94	105	127
H	126	128	162	177	211	248	282	345
h	116	116	143	156	186	211	234	295
W	55	55	63	70	90	90	100	125

單位 Unit: 公釐 mm