


8 CLIENTS LIST NO.		7 TEST PRESSURE		6 SHELL 450 psig AIR 80 psig API 598 CLASS 150		5 SEAT 315 psig 80 psig		STANDARD		DRG NO.		0		2 REVISIONS		1	
TAG NO.										FACE TO FACE (END TO END) ASME B16.10		ZONE   LTR		DESCRIPTION		DATE   APPROVED	
										DIMENSIONS OF ENDS ASME B16.5							
										WALL THICKNESS API 602							

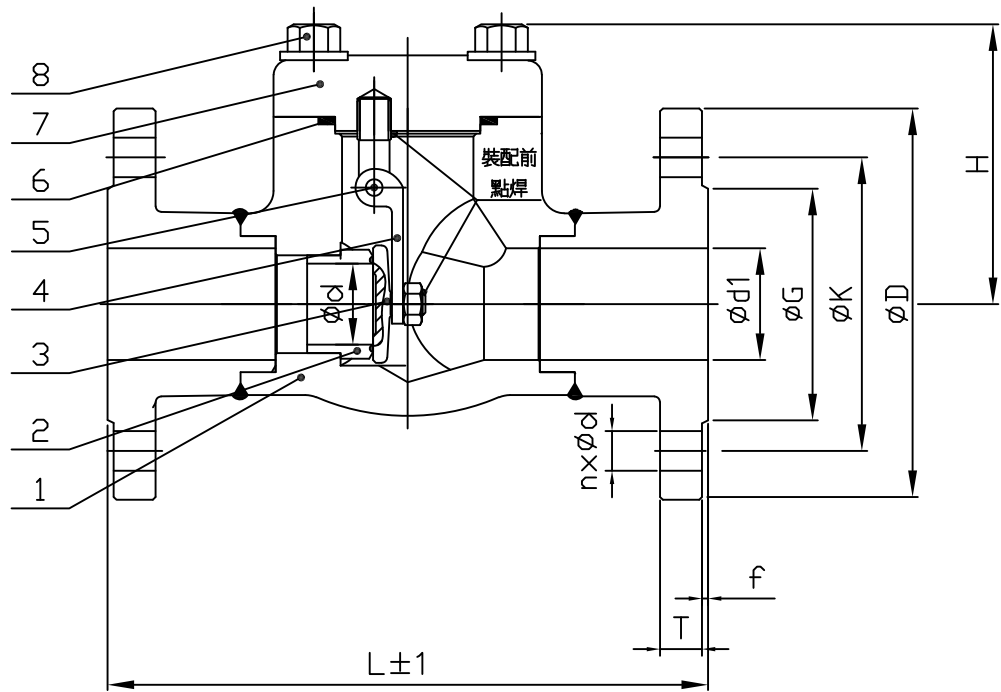

MARK

UNIT : mm

CLASS 150 DIMENSIONS

ITEM NO	QTY	SIZE	φd	L	H	T	f	φd1	φG	φK	φD	nxφd
		1/2"	10	108	55	10	2	15	35	60.5	90	4*φ16
		3/4"	13.5	117	59	11.5	2	20	43	70.0	100	4*φ16
		1"	18	127	66	13	2	25.4	51	79.3	110	4*φ16
		1-1/4"	23	140	82	14.5	2	32	63.5	89	115	4*φ16
		1-1/2"	29	165	92	16	2	40	73	98.6	125	4*φ16
		2"	36	203	106	17.5	2	50.8	92.1	120.6	150	4*φ19

18			
17			
16			
15			
14			
13			
12			
11			
10			
9			
8	CAP BOLT		ASTM A193-B7
7	CAP		ASTM A105
6	GASKET		SPW SS304+GRAPHITE
5	HINGE PIN		ASTM A105
4	ARM HINGE		ASTM A182-F304
3	DISC		ASTM A276-410+H/F STL#6
2	SEAT		ASTM A276-410
1	BODY		ASTM A105
FIND NO.	QTY REQ	NOMENCLATURE OR DESCRIPTION	MATERIAL AND SPECIFICATION

LIST OF MATERIALS

FIG	FN53A1XX--000		
金口金屬股份有限公司			
DRAWN BY	江文暘	106.10.16	TITLE 150LB 1/2"~2" FORGED STEEL SWING TYPE CHECK VALVE FLANGE ENDS
CHECKED BY			
CHIF.	王聰烈	106.10.16	
MANG.	賴金輝	106.10.16	
APPROVED	許進香	106.10.16	SCALE NON
		DRG NO.	
			Rev.0