
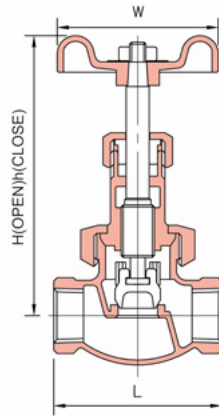


FIG 0529

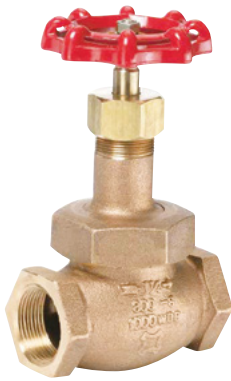

Features

- Rising Stem
- Graphite Packing
- Integral Seat
- Tapered Plug Type Disc
- Stainless Steel Disc and Seat Ring Fig.0505
- Full Ports
- MSS Specification SP-80 Type 1
- Back Seat

詳細尺寸 Dimension

規格	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Size	8	10	15	20	25	32	40	50
L	55	60	67	81	96	108	121	145
H	106	125	131	146	160	177	204	236
h	98	117	121	137	150	166	186	218
W	55	63	63	70	80	90	110	125


序號 NO.	零件	PART	材 質 MATERIAL
1	閥體	BODY	ASTM B61-C92200
2	閥蓋	BONNET	ASTM B61-C92200
3	閥門	DISC	ASTM B62-C83600
4	閥桿	STEM	ASTM B62-C83600
5	迫緊螺帽	PACKING NUT	1/4"~ 1-1/4" ASTM B16-C36000 1-1/2"~ 2" ASTM B62-C83600
6	迫緊	PACKING	GRAPHITE
7	格南	GLAND	ASTM B16-C36000
8	連結螺帽	CONNNECTING NUT	ASTM B61-C92200
9	手輪	HANDWHEEL	ALUMINUM
10	銘牌	NAME PLATE	ALUMINUM
11	螺帽	HANDWHEEL NUT	STEEL

Working pressure Non-Shock 最高工作壓力 (靜流水)		Hydrostatic test pressure 試驗壓力 (水壓)		
Steam, Water, Oil or Gas 蒸汽 . 水 . 油或氣體	300 psi	Shell Test Pressure 閥體測試壓力	Air 氣壓 80 psi	Water 水壓 1500 psi
Cold Working Pressure 常溫工作壓力	1000 psi	Seat Test Pressure 閥座測試壓力	80 psi	1000 psi

*Temperature limitation of 450°F (232°C)

單位 Unit: 公釐 mm

FIG F33B

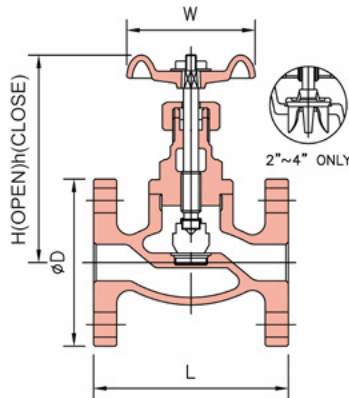

Features

- Rising Stem
- Screwed Bonnet
- Tapered Plug Type Disc
- PTFE packing
- Integral Seat

詳細尺寸 Dimension

規格	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
Size	15	20	25	32	40	50	65	80	100
L	86	96	110	130	150	180	210	240	280
H	85	98	120	127	152	173	201	247	273
h	77	91	105	110	133	152	174	205	233
Ø D	95	100	125	135	140	155	175	185	210
W	63	70	70	70	90	110	110	125	140

序號 NO.	零件	PART	材 質 MATERIAL
1	閥體	BODY	CAST BRONZE
2	閥蓋	BONNET	CAST BRONZE
3	閥門	DISC	1/2"~ 1-1/2" BRASS 2"~ 4" CAST BRONZE
4	閥桿	STEM	BRASS
5	迫緊螺帽	PACKING NUT	1/2"~ 1-1/2" BRASS 2"~ 4" CAST BRONZE
6	迫緊	PACKING	PTFE
7	格南	GLAND	1-1/4"~ 4" BRASS
8	手輪	HANDWHEEL	ALUMINUM
9	銘牌	NAME PLATE	ALUMINUM
10	螺帽	HANDWHEEL NUT	STEEL

Working Pressure Non-Shock 最高工作壓力 (靜流水)		Test Pressure (Mpa) Inspection Standard : JIS 2011 試驗壓力 (Mpa)		
Water, Non shock, under 120°C 120°C以下靜流水	1.4 Mpa	Shell Test Pressure 閥體測試壓力	Air 氣壓 0.6 Mpa	Water 水壓 2.1 Mpa
Oil, Gas, Air or water under 120°C 120°C以下之油, 瓦斯, 空氣或水	1.0 Mpa	Seat Test Pressure 閥座測試壓力 (1/2-4 inch, 15-100mm)	0.6 Mpa	

單位 Unit: 公釐 mm