


8 CLIENTS LIST NO.		7 TEST PRESSURE		6 SHELL 450 psig AIR psig API 598 CLASS 150		5 SEAT 315 psig 80 psig		STANDARD		DRG NO.		0		2 REVISIONS		1	
TAG NO.										FACE TO FACE (END TO END) ASME B16.10		ZONE LTR		DESCRIPTION		DATE APPROVED	
										DIMENSIONS OF ENDS ASME B16.5							
										WALL THICKNESS API 602 CLASS 800							

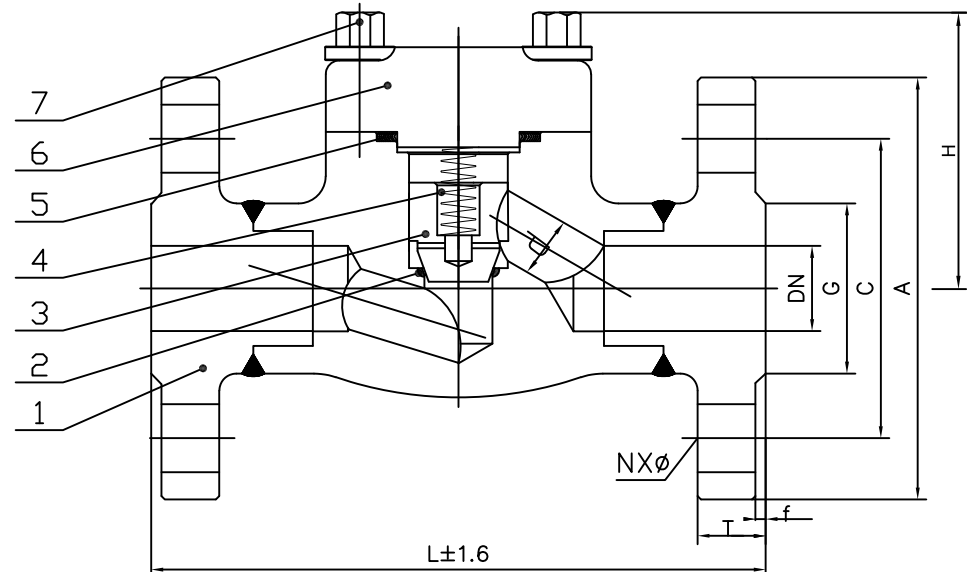


 SIZE-150
 MARK


UNIT : mm

CLASS 150 DIMENSIONS

ITEM NO	QTY	SIZE	ød	L	H	T	f	ød1	øG	øK	øD	nxød
		1/2"	10	108	61	9.7	1.6	12.7	35	60.5	90	4*ø16
		3/4"	13.5	117	63	10.5	1.6	19.1	43	70.0	100	4*ø16
		1"	17.5	127	78	11.2	1.6	25.4	51	79.3	110	4*ø16
		1-1/2"	28.3	165	88	14.3	1.6	38.1	73	98.6	127	4*ø16
		2"	36	178	108	15.8	1.6	50.8	92	120.6	152.4	4*ø19

18			
17			
16			
15			
14			
13			
12			
11			
10			
9			
8			
7	CAP BOLT		ASTM A193-B7
6	CAP		ASTM A105
5	GASKET		SPW SS304+GRAPHITE
4	SPRING		S.S. 304
3	DISC		ASTM A276-410+H/F STL#6
2	SEAT		ASTM A105
1	BODY		ASTM A105
FIND NO.	QTY REQ	NOMENCLATURE OR DESCRIPTION	MATERIAL AND SPECIFICATION

LIST OF MATERIALS

FIG	FN63A1XX--000		
 金口金屬股份有限公司			
DRAWN BY	江文暘	106.10.16	TITLE 150LB 1/2"~2" FORGED STEEL LIFT TYPE CHECK VALVE O.S.&Y. B.B W/ INTEGRAL FLANGE ENDS
CHECKED BY			
CHIF.	王聰烈	106.10.16	
MANG.	賴金輝	106.10.16	
APPROVED	許進春	106.10.16	SCALE NON
		DRG NO.	83620005000XX Rev.0